


# LC-6210: Bright, Big Screen Multimedia.

## KEY FEATURES:

- 850 ANSI LUMENS light output at 70% uniformity for brilliant images--even in normal light!
- High-performance lens with power zoom and focus projects up to a 300" diagonal picture from distances up to 85.7'.
- 640 x 480 pixel resolution for VGA & MAC. Also, handles 800 x 600 VGA in compressed mode.
- Variable Optical Keystone Correction can reduce or eliminate off axis image distortion.
- Bonus! IR50 wireless remote mouse control and real-time Presentation F/X software.

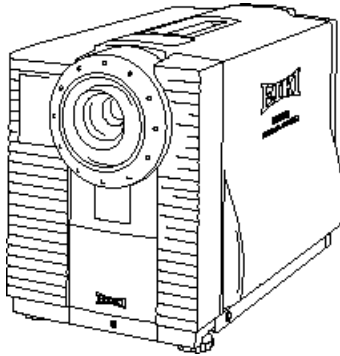

## LC-6210 SPECIFICATIONS:

Screen Brightness	850 ANSI Lumens
Illumination Uniformity	70%
Size of Color Palette	16.7 Million
Contrast Ratio	100 : 1
Horizontal Resolution	550 TV Lines
Projection Lamp	400-Watt, Long-Life Metal-Halide
Light - RGB Distribution	Dichroic Mirror System
Imaging System	3.1" Amorphous TFT Panels x 3
Screen Pixels	640 x 480 = 307,200
Total Pixels	307,200 x 3 = 921,600
Lens Type	Power Zoom and Focus
Image Min. - Max. (Diag.)	20" - 300"
Image Min. - Max. (Wide)	1.3' - 20' (0.41m - 6.10m)
Throw - Min. - Max.	5.7' - 85.7' (1.75m - 26.13m)
Width-to-Throw Factor	Approx. 2.1 - 4.3
Elevation: Front/Rear	Variable up to 5 Degrees Up
Keystone Elimination	Variable Up or Down, max. degrees 3.13, max ratio (B:T) 2.3:1/1:2.3
Image Orientation	Normal, Reversed
Remote Control	IR Projector & Mouse Control
Computer Standards	VGA, EGA, CGA, MAC 13

## OTHER IMPORTANT FEATURES:

- High light output, long-life 400-Watt Metal Halide lamp.
- Accepts most video input: NTSC, NTSC 4.43, PAL and SECAM.
- Multi-Voltage (100-240VAC) and Multi-Cycle (50/60 Hz).
- Included Accessories: Power Cord, Lens Cap, Dust Cover, Owner's Manual, VGA"Y" input cable and MAC "Y" input cable, VGA & MAC terminators, IR Projector Remote Control & Batteries, "RS-232" Computer Control Cable and Software, Bonus: IR50 Remote Mouse & Presentation F/X.
- Optional Accessories: Padded Dust Cover, Hard Shipping Case with wheels, 30 ft. (9M) Wired Remote Cord.

## SPECIFICATIONS (cont.)

Special Capabilities:	800 x 600 SVGA, compressed
Computer Channels	1
Computer Inputs	DB25 x 1, 5 BNC (RGBHV)
Computer Monitor Out	"Y" Input Cable
Computer Audio Inputs	RCA x 2 (L/R)
Video Standards	NTSC/PAL/SECAM/NTSC 4.43
Video Channels	2
Video Input	AV1: RCAx1, BNC x 1, S-Video x 1, AV2: 1 x RCA
Video Output	RCA x 1
Video Audio Input	AV1: RCAx 2 (L/R), AV2: RCA x 2 (L/R)
Audio - Amplifier	3 Watts RMS Mono
Audio - Built-in Speaker	2" x 3.5" (5cm x 9cm) x 1
Audio - Audio Monitor	RCAx 2 (L/R)
Size (HxWxD)	15.5" x 13.3" x 22" (394 x 337.5 x 594 mm)
Weight	51.8Lb. (23.5 kg)
Power Requirements	AC, 120-240 50/60 Hz
Power Consumption	630 Watts
Power Cord	10' (3M) Type 3, Detachable
Safety Compliances	UL Listed
Warranty - Projector	1 Year Parts & Labor
Warranty - Lamp	3 Months

Specifications subject to change without notice.

©1997 Eiki International, Inc. Printed in the USA. 4/16/97

# EIKI

A-Key to better communications.